



**4" Duct (Standard):**  
 110 CFM/0.4 Sones @ 0.1 SP, 14.5 Watts  
 95 CFM/0.8 Sones @ 0.25 SP, 17.0 Watts



## Description

Low noise ceiling mount ventilating fan/Light/Night-Light rated for continuous running. Fan has been awarded ENERGY STAR® Most Efficient in 2014. It is HVI, UL, and cUL certified, and can be used to comply with ASHRAE 62.2 (local and whole building continuous and intermittent operation). Meet CA Title 24 requirements.

## DC Motor/Blower

- Power rating of 120 volts/60Hz
- DC brushless motor engineered to run continuously
- Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor
- Built-in soft start function to increase bearings' life
- Automatically powers off when impeller is locked abnormally
- Self-compensating motor speed for intended airflow when static pressure is encountered

## Housing

- Galvanized steel body
- Detachable 4" diameter metal duct adapter
- Built-in backdraft damper
- Easy installation with expandable extension bracket

## Grille

- Attractive design using ABS material

## Light

- (1) GU24 26-watt compact fluorescent lamp included
- (1) E12 4-watt night light included
- Main light output 1850 Lumens, 2700K

## LED Indicator

- Turn the power switch on/off to operate on/off.  
LED indicator will be green when power is on


## Warranty

- 3-year limited warranty


BreezSignature SIG110L	4" Duct (Standard)	
Static Pressure (inches w.g.)	0.1	0.25
Air Flow (CFM)	110	95
Sones	0.4	0.8
Power Consumption (Watts)	14.5	17.0
Energy Efficiency (CFM/Watt)	8.5	6.2
Current (Amps)	0.82 Max	
Power Rating (V/Hz)	120/60	
Main Light (Watt)	26	
Night Light (Watt)	4	

## TYPICAL SPECIFICATION

Ventilation fan shall be Delta Breez model SIG110L; ENERGY STAR qualified with DC brushless motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 110 CFM and loudness rating of 0.4 Sones at 0.1 static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 14.5 Watts with efficiency rating of 8.5 CFM/Watt; fan will feature LED indicator running light, motor lock protection and self-compensating motor speed for intended airflow when static pressure is encountered. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

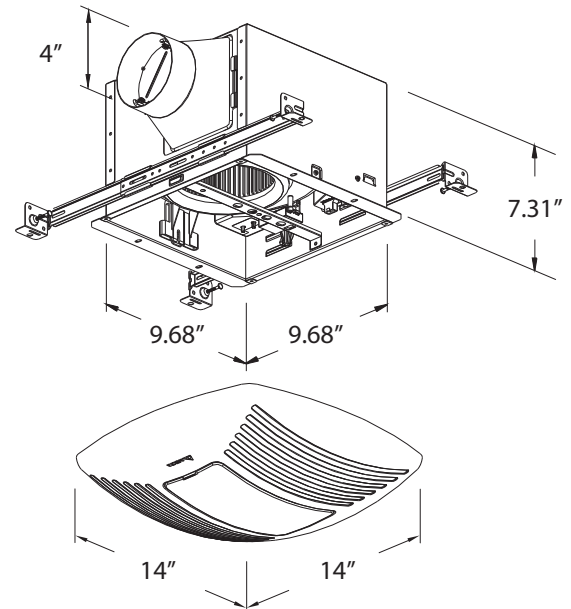

Fan Curve

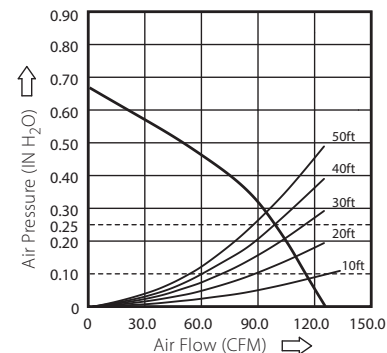

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: