GlobalTowne ~ 888-726-9752

Specifications

Delta BreezSignature
Perfectly quiet. Perfectly green.

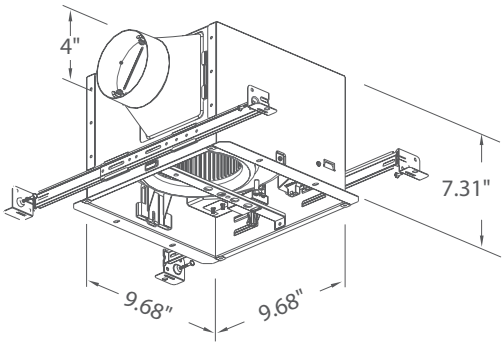







Delta BreezSignature Series	SIG80** / SIG80D / SIG80M								SIG80MLED								SIG80L	SIG110L	SIG110** SIG110H / SIG110D								SIG110LED		SIG110DL / SIG110HL							
Fan Speed	Continuous Low Speed							Full Speed	Continuous Low Speed							Full Speed	Full Speed	Full Speed	Continuous Low Speed							Full Speed	Full Speed		Continuous Low Speed							Full Speed
Static Pressure (Inches w.g.)	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25								
Air Flow (CFM)	30	31	50	50	60	61	80	79	30	30	50	50	60	60	80	80	80	80	110	95	30	31	60	61	80	79	110	95	110	94	30	31	60	61	80	80	110	95
Sones	<0.3	<0.3	<0.3	<0.3	<0.3	0.3	<0.3	0.5	<0.3	<0.3	<0.3	0.4	<0.3	0.4	<0.3	0.6	<0.3	0.6	0.4	0.8	<0.3	<0.3	<0.3	0.3	<0.3	0.5	<0.3	0.6	0.4	0.8	<0.3	<0.3	<0.3	0.4	<0.3	0.6	0.4	0.8
Power Consumption (Watts)	4.8	8.9	6.6	9.8	6.7	11.8	8.7	14.0	4.9	9.0	6.1	11.4	7.2	12.5	9.5	14.9	9.5	14.9	14.5	17.0	4.8	8.9	6.7	11.8	8.7	14.0	13.6	16.0	14.8	17.3	5.4	9.3	7.7	12.8	9.5	14.9	14.5	17.0
Energy Efficiency (CFM/Watt)	7.7	4.1	8.4	5.2	9.9	5.6	9.7	6.3	7.6	4.2	8.9	5.2	9.3	5.9	9.3	6.2	9.4	6.2	8.5	6.2	7.7	4.1	9.9	5.6	9.7	6.3	9.0	6.4	8.4	6.0	7.6	4.3	9.0	5.6	9.4	6.2	8.5	6.2
Current (Amps)	0.30 Max								0.40 Max								0.74 Max	0.82 Max	0.38 Max								0.48 Max		0.82 Max							
Power Rating (V/Hz)	120/60								120/60								120/60		120/60								120/60		120/60							
Mounting Opening	9.68″ x 9.68″								9.68″ x 9.68″								9.68″ x 9.68″		9.68″ x 9.68″								9.68″ x 9.68″		9.68″ x 9.68″							
Mounting Depth	7.31″								7.31″								7.31″		7.31″								7.31″		7.31″							
Grille Size	12.36″x12.36″								12.36″x12.36″								14″x14″		12.36″x12.36″								12.36″x12.36″		14″x14″							
Duct Diameter	4″								4″								4″		4″								4″		4″							
Lamp (Watts)	N/A								13								26		N/A								13		26							
Night Light (Watts)	N/A								2								4		N/A								2		4							
Lamp Style	N/A								LED module								GU24 CFL		N/A								LED module		GU24 CFL							
Color Temperature	N/A								2700K								2700K		N/A								2700K		2700K							
Lumens	N/A								800								1850		N/A								800		1850							
Automatic Operation	Yes - SIG80M (motion sensing)								Yes								N/A		Yes - SIG110H (humidity sensing)								N/A		Yes - SIG110HL (humidity sensing)							
Dual Speed Operation	Yes - SIG80M (motion sensing) Yes - SIG80D (dual speed)								Yes								N/A		Yes - SIG110D (dual speed) Yes - SIG110H (humidity sensing)								N/A		Yes - SIG110DL (dual speed) Yes - SIG110HL (humidity sensing)							
Shipping Gross Weight (Lbs)	10								12.20								12.20		10								12.20		12.20							
cUL Tub/Shower Enclosure	Yes								Yes								Yes		Yes								Yes		Yes							
California Title 24 Compliant	Yes								Yes								Yes		Yes								Yes		Yes							
Mfg in ISO 9001 Certified Factory	Yes								Yes								Yes		Yes								Yes		Yes							
ENERGY STAR® Qualified	Yes								Yes								Yes		Yes								Yes		Yes							
ENERGY STAR Most Efficient 2015	Yes								Yes								Yes		Yes								Yes		Yes							
Warranty (Years)	3								3								3		3								3		3							

** Models SIG80 and SIG110 do not have 30, 50, or 60 CFM adjustable low speed.

Design and specifications subject to change without notice.

Fan/LED Light | Fan/CFL Light | Adjustable motion sensor | Adjustable humidity sensor | Adjustable dual speed

DELTA
46101 Fremont Blvd. | Fremont, CA 94538
tel 1.888.979.9889 | www.deltabreez.com

www.globaltowne.com